Bandweaver

DATASHEET

DTS IP65 rated wall mounted enclosure

FRONT VIEW

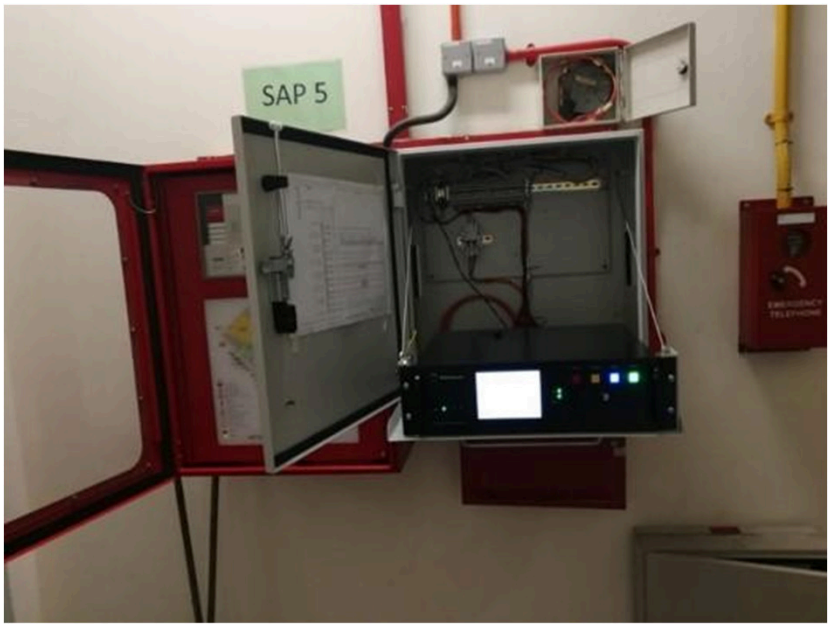

Application

- Suitable for wall mounting Bandweaver's FireLaser & T-Laser DTS units providing secure easy access.
- Suitable for environments that required to be “dust tight” or with resistance to jets of water or heavy seas.
- Battery compartment available below DTS unit

Standards

- Conforms to IP65 Standards
- Conforms to NEMA 4 standard

Finish

- Electro-galvanised
- Electrostatic Epoxy powder coating thickness 50microns, oven baked shiny finish

Construction

- Enclosure and cover are fabricated from 14 gauge steel
- Enclosure body has mounting holes on the back which are accessible with or without the optional panel installed
- Cover is secured to the body with heavy duty hinge on one side and tight fit with compartment in locked position
- Dimension:
  - Height 850mm
  - Width 600mm
  - Depth 250mm
- Maximum Loading 30Kg

Accessories

- Separate lower locked section for battery storage

Monitored | Secured | Safe

Dimensions

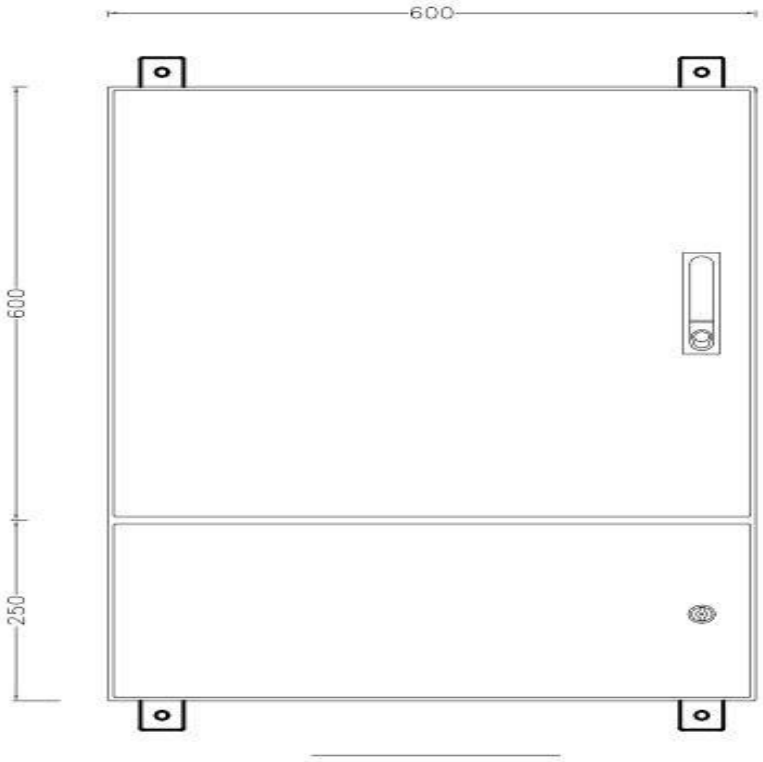

Front View

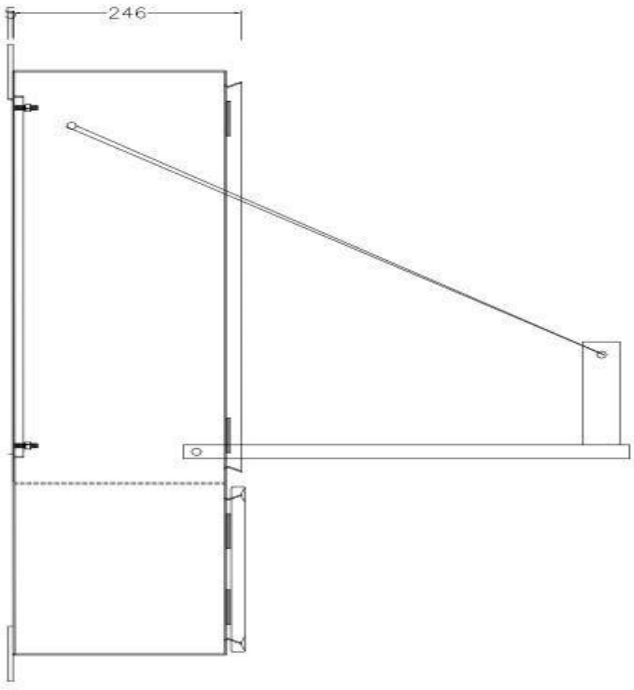

Side View