Bandweaver

DATASHEET

Rack Mounted Splice Tray

This rack mounted splice tray/patch panel is designed for use in control room applications. With a 1U profile it can take up to 24 cable inputs.

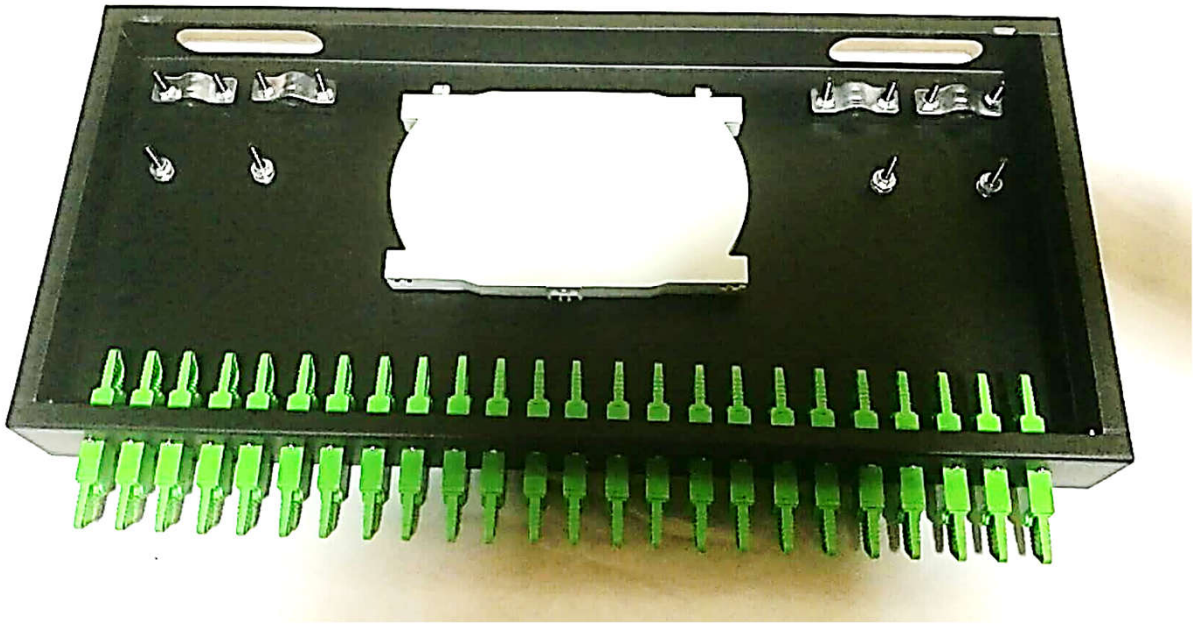

Monitored | Secured | Safe

TECHNICAL INFORMATION

GENERAL	
Model No.	DTS-FL-SB-01
Junction box size (L * W * H)	482mm *201mm*44mm
Rack height	1U
Net weight	1.47 kg (gross weight 1.6 kg)
Connector type	E2000 (24 connectors included as standard)
Simplex/duplex	Simplex
Number of ports	24
Splice cassette capacity	24 splices with heat shrinks, with storage area for bare fibers
Cable entry points	4 oval ports
Material	Cold rolled plate
Material thickness	0.8mm
Colour	Black
Installation mode	Rack type
Insertion loss	≤0.2dB
Return loss	≥60dB
Application	Indoor use
FIBER DETAILS	
Fiber type	62.5/125μm (FireLaser) or 50/125μm (T-Laser)
Single/ multimode	Multimode
ENVIRONMENTAL CONDITIONS	
Operating temperature	-20°C ~ 70°C
Storage temperature	-20°C ~ 70°C